




Preliminary
Information

M45A

MULTI-POWER ARTICULATING BOOM LIFT

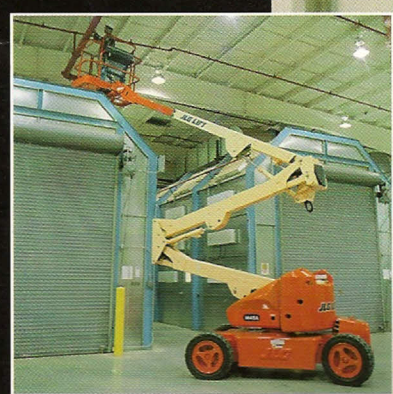

JLG MODEL M45A

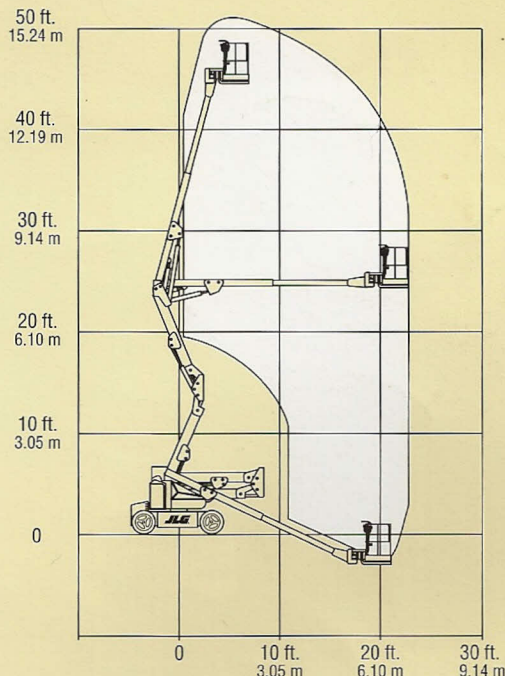

REACH SPECIFICATIONS

Platform Height.....	45 ft. (13.72 m)
Horizontal Outreach.....	22 ft. 8 in. (6.91 m)
Up and Over Height.....	24 ft. 7 in. (7.49 m)
Swing	360 Degrees Non-Continuous
Platform Capacity.....	500 lbs. (227 kg)
Platform Rotator.....	110 Degrees Hydraulic

DIMENSIONAL DATA

A. Platform Size	30 x 60 in. (0.76 x 1.52 m)
B. Overall Width	5 ft. 9 in. (1.75 m)
C. Tailswing.....	Zero
D. Stowed Height	6 ft. 5 in. (1.95 m)
E. Stowed Length	18 ft. 8 in. (5.69 m)
F. Wheelbase	6 ft. 7 in. (2.01 m)
G. Ground Clearance.....	8.5 in. (22 cm)
Gross Vehicle Weight*	12,500 lbs. (5,670 kg)

CHASSIS

Drive Speed	3.3 mph (5.6 kph)
Gradeability	30%
Turning Radius (Inside).....	22 in. (56 cm)
Turning Radius (Outside).....	121 in. (3.07 m)
Tire Size/Type	240/55-17.5 pneumatic

POWER SOURCE

Electrical System	48V DC
Batteries	8 x 6V 370 amp-hr
Drive Motors	Dual Electric Traction
Brakes.....	Automatic Spring Applied Multiple Discs
Hydraulic Motor/Pump	Perm. Magnet Motor/Gear Pump
Hydraulic Reservoir.....	4 gal. (15.2 L)
Generator Set	Fully Automatic, 55 amp
	Yanmar 6 hp Air-Cooled Engine
Engine Fuel Tank.....	4 gal. (15.2 L)

* certain options or country standards will increase weight

PERFORMANCE FEATURES

Standard Features

Multiple Function Operation
Fully Proportional Controls
30 x 60 in. (0.76 x 1.52 m)
Low Mount Platform
Inward Swinging Gate
110 Degree Hydraulic
Platform Rotator

SCR Automatic Battery Charger
110V-AC Receptacle on Platform
5 Degree Tilt Alarm/Indicator
Hourmeter
Horn
Battery Condition Indicator
Lifting/Tie Down Lugs

Available Options

30 x 48 in. (0.76 x 1.22 m)
Low Mount Platform
Platform Work Lights
Foam-Filled Tires
Wheel Covers
Cylinder Bellows

Travel Alarm
Lift Down Alarm
All Motion Alarm
Flashing Amber Beacon
Alarm Package
Head & Tail Lights

Outstanding performance — even off-slab

The new JLG M45A multi-power boom lift represents the most versatile and efficient electric boom lift available today, providing outstanding performance wherever you need it. The M45A electrically powered boom lift helps eliminate downtime caused by drained batteries. A diesel engine-powered generator keeps the batteries charged, automatically or selectively. Plus, a traction control system, combined with JLG's exclusive all-terrain tires, ensures superior traction off-slab, where other electric boom lifts can't follow.

M45A Boom Lift Advantages:

- Multi-Power System with automatic battery charging
- Automatic Traction Control for off-slab performance
- Faster operating speeds
- Multiple, simultaneous boom functions
- Fully proportional controls and more
- Parts commonality with certain other JLG boom lifts

The JLG "1 & 5" Warranty

JLG Industries, Inc. backs our products with our exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) full years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable OSHA Regulations in 29 CFR 1910.67, 1926.451, (f) 29 CFR 1926.556, A92.5-1992, as originally manufactured for intended applications.

ALQUILER SUR

- IZAJES - TRASLADOS
- TRABAJOS DE CAMION - GRUA
- PLATAFORMAS DE ELEVACION 8-10-12 MTS.
- ALQUILER Y VENTAS DE EQUIPOS



De: José A. Miguelezzi - Cel: (0341) 155-156844
Dario J. Miguelezzi - Cel: (0341) 156-833645

Tel.: (0341) 464-9988 / 466-6504 - Buenos Aires 5007 - Rosario (2000)
E-mail: dario@miguelezzi.com Web: www.alquiler-sur.com.ar